


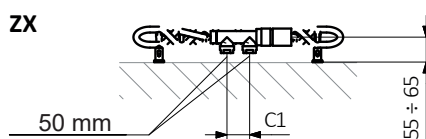


Cod. Modello Model	Altezza Height H mm	Larghezza width L mm	Interasse Distance betw. centers l mm	Cont. Acqua Water Cont. Lt	Peso Weight Kg	$\Delta t=50^{\circ}\text{C}$ Watt/el Kcal/h el	$\Delta t=30^{\circ}\text{C}$ Watt
Maibe/1580/026	1580	263	50	1,26	7.02	331	169
Maibe/1780/026	1780	263	50	1,43	7.93	373	190
Maibe/1800/046	1800	463	50	2,70	14.78	690	352
Maibe/1800/066	1800	663	50	3,96	21,63	1007	514


Connessione standard 50mm centrali-Standard connection 50mm




580 x 263



1780 x 263

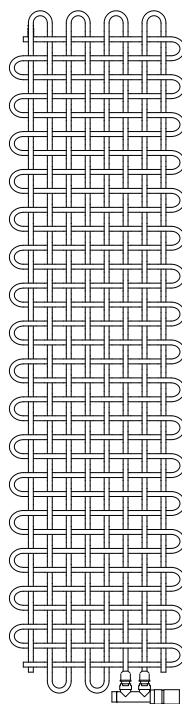

1800 x 463

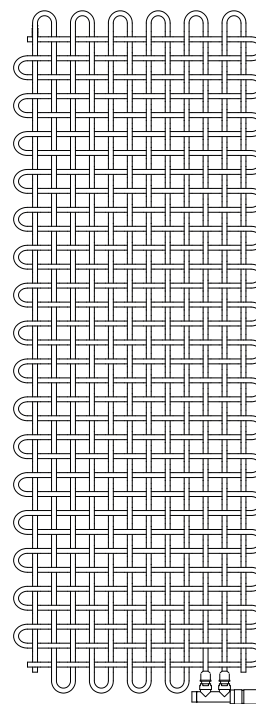


1800 x 663



componenti inclusi-Included components:

Il radiatore è venduto con una valvola twin ad angolo termostattabile , una testa termostatica minimal adattatori per l'installazione alupex 16x2 (o rame a richiesta).Tutte le valvole sono nella finitura cromo.

The radiator is sold with an itegrated , angled thermostatic valve,SLIM thermostatic head and adapters for installation Alupex 16x2 (or copper on request). All the valve cpmponents are finished in chrome.

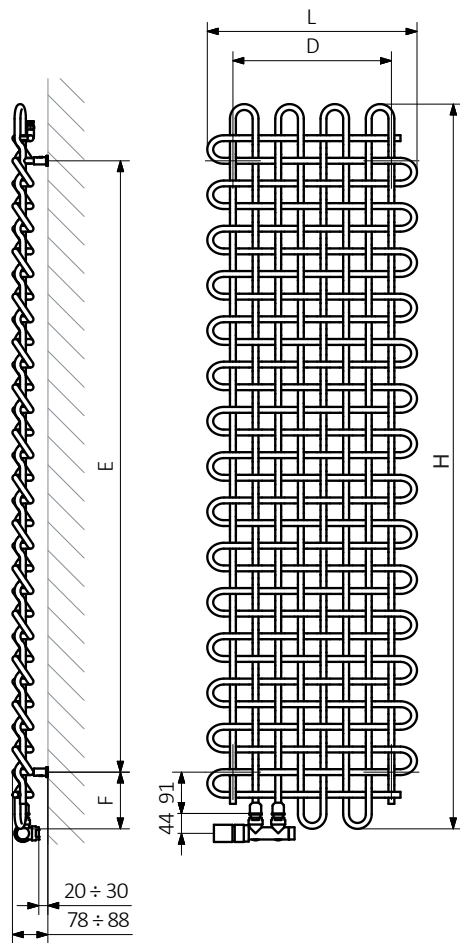

Connessione a richiesta 50mm DX o SX
On request connection 50mm DX or SX



H: Altezza-Height

L: Larghezza massima-Max Width

D: Distanza tra i fissaggi orizzontali-Horizontal distance between mounting bracket centers

E: Distanza verticale tra i fissaggi-Vertical distance between mounting brackets

F: Distanza tra i fissaggi e uscita tubi-Distance between mounting bracket and the bottom

