




STELVIO

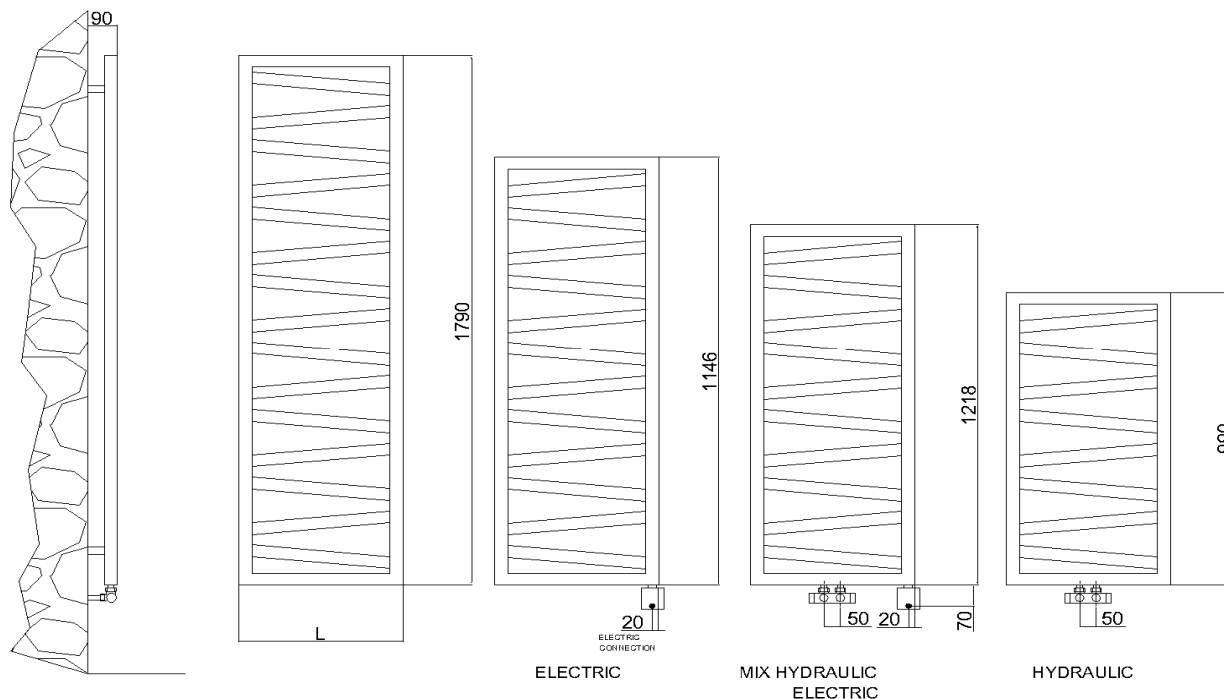

Stelvio è costruito con tubi in acciaio laminato a freddo a sezione rettangolare 40x10 mm.
Collettori tubo quadro 40x40 mm. Temperatura massima di esercizio 95°C.
Pressione di esercizio 5 bar.

Codice	I	H	L	TUBI	Watt Δt 50°C	Ral 9010 €	CL €	CX €
DS40050	50	990	500	8	418			
DS41060	50	990	600	8	482			
DS41040	50	1218	400	10	507			
DS41050	50	1218	500	10	599			
DS42040	50	1445	400	12	625			
DS42050	50	1445	500	12	737			
DS42060	50	1445	600	12	849			
DS43040	50	1790	400	15	743			
DS43050	50	1790	500	15	875			
DS43060	50	1790	600	15	985			

INTERASSE STANDARD 50 MM A RICHESTÀ INTERASSI PARTICOLARI