

## Thot singolo

Cod. Modello Model	N. tubi Tubes	Altezza Height H mm	Larghezza width L mm	Interasse Distance betw. centers l mm	Cont. Acqua Water Cont. Lt	Peso Weight Kg	$\Delta t=50^{\circ}\text{C}$ Watt/el Kcal/h el		Esponente n Exponent n	$\Delta t=30^{\circ}\text{C}$ Watt
25										
Thot/01/0788/0400	17+8	788	400	350	2.72	6.01	410	352	1.20	191
Thot/01/0788/0450	17+8	788	450	400	2.93	6.54	437	375	1.20	203
Thot/01/0788/0500	17+8	788	500	450	3.13	7.08	463	398	1.20	216
Thot/01/0788/0600	17+8	788	600	550	3.45	8.14	517	445	1.20	241
Thot/01/0788/0750	17+8	788	750	700	4.02	9.74	600	516	1.20	280
36										
Thot/01/1180/0400	17+11+8	1180	400	350	4.01	8.76	600	515	1.20	279
Thot/01/1180/0450	17+11+8	1180	450	400	4.23	9.46	634	545	1.20	295
Thot/01/1180/0500	17+11+8	1180	500	450	4.44	10.16	669	575	1.20	311
Thot/01/1180/0600	17+11+8	1180	600	550	5.07	11.56	756	650	1.20	352
Thot/01/1180/0750	17+11+8	1180	750	700	5.86	13.70	875	752	1.20	407
44										
Thot/01/1488/0400	17+11+8+8	1488	400	350	4.91	10.76	739	635	1.20	344
Thot/01/1488/0450	17+11+8+8	1488	450	400	5.22	11.65	787	676	1.20	366
Thot/01/1488/0500	17+11+8+8	1488	500	450	5.53	12.55	834	717	1.20	389
Thot/01/1488/0600	17+11+8+8	1488	600	550	6.27	14.34	945	813	1.20	440
Thot/01/1488/0750	17+11+8+8	1488	750	700	7.26	17.03	1079	928	1.20	502
51										
Thot/01/1768/0400	17+11+8+8+7	1768	400	350	5.80	12.74	874	752	1.22	403
Thot/01/1768/0450	17+11+8+8+7	1768	450	400	6.16	13.77	928	798	1.22	428
Thot/01/1768/0500	17+11+8+8+7	1768	500	450	6.51	14.80	982	845	1.22	453
Thot/01/1768/0600	17+11+8+8+7	1768	600	550	7.23	16.86	1089	937	1.20	507
Thot/01/1768/0750	17+11+8+8+7	1768	750	700	8.40	19.95	1266	1089	1.20	590

I watt hanno valori provvisori in attesa di certificazione  $\Delta T=50^{\circ}\text{C}$  / The watt values are not definitive awaiting for  $\Delta T=50^{\circ}\text{C}$  certification

## Thot singolo Cromo


Cod. Modello Model	N. tubi Tubes	Altezza Height H mm	Larghezza width L mm	Interasse Distance betw. centers l mm	Cont. Acqua Water Cont. Lt	Peso Weight Kg	$\Delta t=50^{\circ}\text{C}$ Watt/el Kcal/h el		Esponente n Exponent n	$\Delta t=30^{\circ}\text{C}$ Watt
25										
ThotCr/01/0788/0400	17+8	788	400	350	2.72	6.01	153	131	1.20	83
ThotCr/01/0788/0450	17+8	788	450	400	2.93	6.54	163	140	1.20	88
ThotCr/01/0788/0500	17+8	788	500	450	3.13	7.08	173	148	1.20	93
ThotCr/01/0788/0600	17+8	788	600	550	3.45	8.14	193	166	1.20	104
ThotCr/01/0788/0750	17+8	788	750	700	4.02	9.74	224	192	1.20	121
36										
ThotCr/01/1180/0400	17+11+8	1180	400	350	4.01	8.76	223	192	1.20	121
ThotCr/01/1180/0450	17+11+8	1180	450	400	4.23	9.46	236	203	1.20	128
ThotCr/01/1180/0500	17+11+8	1180	500	450	4.44	10.16	249	214	1.20	135
ThotCr/01/1180/0600	17+11+8	1180	600	550	5.07	11.56	283	242	1.20	153
ThotCr/01/1180/0750	17+11+8	1180	750	700	5.86	13.70	326	280	1.20	177
44										
ThotCr/01/1488/0400	17+11+8+8	1488	400	350	4.91	10.76	275	237	1.20	149
ThotCr/01/1488/0450	17+11+8+8	1488	450	400	5.22	11.65	293	252	1.20	159
ThotCr/01/1488/0500	17+11+8+8	1488	500	450	5.53	12.55	311	267	1.20	168
ThotCr/01/1488/0600	17+11+8+8	1488	600	550	6.27	14.34	352	303	1.20	191
ThotCr/01/1488/0750	17+11+8+8	1488	750	700	7.26	17.03	402	346	1.20	218
51										
ThotCr/01/1768/0400	17+11+8+8+7	1768	400	350	5.80	12.74	322	277	1.22	173
ThotCr/01/1768/0450	17+11+8+8+7	1768	450	400	6.16	13.77	342	294	1.22	184
ThotCr/01/1768/0500	17+11+8+8+7	1768	500	450	6.51	14.80	362	312	1.22	194
ThotCr/01/1768/0600	17+11+8+8+7	1768	600	550	7.23	16.86	406	349	1.20	220
ThotCr/01/1768/0750	17+11+8+8+7	1768	750	700	8.40	19.95	472	406	1.20	256

I watt hanno valori provvisori in attesa di certificazione  $\Delta T=50^{\circ}\text{C}$  / The watt values are not definitive awaiting for  $\Delta T=50^{\circ}\text{C}$  certification

# Thot doppio

Cod. Modello Model	N. tubi Tubes	Altezza Height H mm	Larghezza width L mm	Interasse Distance betw. centers l mm	Cont. Acqua Water Cont. Lt	Peso Weight Kg	$\Delta t=50^{\circ}\text{C}$ Watt/el	$\Delta t=50^{\circ}\text{C}$ Kcal/h el	Esponente n Exponent n	$\Delta t=30^{\circ}\text{C}$ Watt
<b>50</b>										
Thot/02/0788/0400	34+16	788	400	350	4.18	9.89	565	486	1.20	263
Thot/02/0788/0450	34+16	788	450	400	4.54	10.87	615	529	1.20	286
Thot/02/0788/0500	34+16	788	500	450	4.91	11.84	664	571	1.20	309
Thot/02/0788/0600	34+16	788	600	550	5.64	13.78	763	656	1.20	356
Thot/02/0788/0750	34+16	788	750	700	6.73	16.69	912	784	1.20	425
<b>72</b>										
Thot/02/1180/0400	34+22+16	1180	400	350	6.02	14.45	816	702	1.20	380
Thot/02/1180/0450	34+22+16	1180	450	400	6.55	15.94	888	763	1.20	413
Thot/02/1180/0500	34+22+16	1180	500	450	7.08	17.43	959	825	1.20	447
Thot/02/1180/0600	34+22+16	1180	600	550	8.14	20.13	1103	949	1.20	514
Thot/02/1180/0750	34+22+16	1180	750	700	9.73	24.41	1318	1133	1.20	614
<b>88</b>										
Thot/02/1488/0400	34+22+16+16	1488	400	350	7.52	17.83	1019	876	1.20	475
Thot/02/1488/0450	34+22+16+16	1488	450	400	8.15	19.57	1104	949	1.20	514
Thot/02/1488/0500	34+22+16+16	1488	500	450	8.78	21.31	1189	1022	1.20	554
Thot/02/1488/0600	34+22+16+16	1488	600	550	10.04	24.90	1360	1169	1.20	633
Thot/02/1488/0750	34+22+16+16	1488	750	700	11.92	30.13	1615	1389	1.20	752
<b>102</b>										
Thot/02/1768/0400	34+22+16+16+14	1768	400	350	8.76	20.98	1186	1020	1.22	547
Thot/02/1768/0450	34+22+16+16+14	1768	450	400	9.47	23.03	1283	1103	1.22	592
Thot/02/1768/0500	34+22+16+16+14	1768	500	450	10.19	25.09	1380	1186	1.22	636
Thot/02/1768/0600	34+22+16+16+14	1768	600	550	11.72	29.21	1587	1364	1.20	739
Thot/02/1768/0750	34+22+16+16+14	1768	750	700	13.91	35.38	1884	1620	1.20	877

I watt hanno valori provvisori in attesa di certificazione  $\Delta T=50^{\circ}\text{C}$  / The watt values are not definitive awaiting for  $\Delta T=50^{\circ}\text{C}$  certification

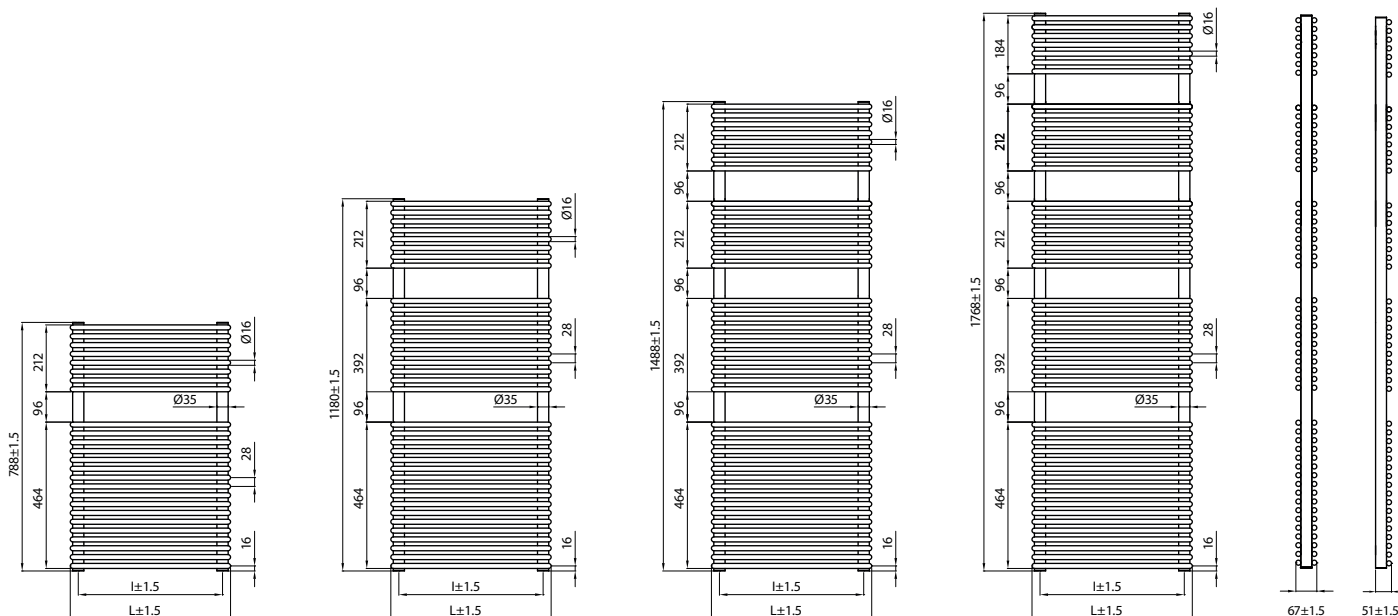

788

1180

1488

1768

Thot 02

01